

Application data

Beam style	well-defined, flat field profile projection
Suitable for	large scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 – 30m

Electrical data

Supply Volts	230/240V AC single phase
Max. Lamp Watts	2000W
Lamp base	GY16
Auto-disconnect	double-pole microswitch
Cable/connection	2m, 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical data

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter aluminium
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø28mm tube supplied
Handle	one, covering rear and side of the followspot
Weight/Packed weight	18kg / 22,4kg
Overall dimensions	350mm (w) x 980mm (d) x 232mm (h) x max 430mm (h) see drawing
Packed volume	0.204m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Colour frame	metal, 185 x 185mm, supplied
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational data

Focus adjustment	slide zoom controls (dia/softness) at side
Lamp alignment	factory set
Beam Shaping	20-leaf iris included; shutters are accessories
Dimming	by mains supply + optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

2000W	CP72 GY16 230/240V 3200K 480 hrs
-------	----------------------------------

LDR recommends Philips lamps

Accessories

Lamps	see above		
Spare colour frame	20100106		
Spare iris diaphragm	20100707	Gobo holder, A/B size	20100807
Black tripod	20102401	Chrome plated tripod	20102402
5-colour colour changer	20105106	Spare spigot ø28mm	20102200
Stirrup-kit for suspension	20102900		
Xpress-Follow, scroller kit	20657180	scroller/Colour Commander/cable	
Flight case with braking wheels	20107080	for f.spot/ballast/col.chang./tripod	

Photometric data

Narrow focus		CP72									
Beam dia.	2.0	2.2	2.5	2.8	3.1	3.4	3.6	3.9	4.2	m	
lux	2443	1870	1478	1197	989	831	708	611	532		
Distance	14	16	18	20	22	24	26	28	30	m	

Wide focus											
Beam dia.	3.9	4.7	5.4	6.2	7.0	7.8	8.6	9.3	10.1	m	
lux	2000	1389	1020	781	617	500	413	347	296		
Distance	10	12	14	16	18	20	22	24	26	m	


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

Canto[®] 2000th MK2

2000W, 230/240V

TH followspot

part number : 10907170

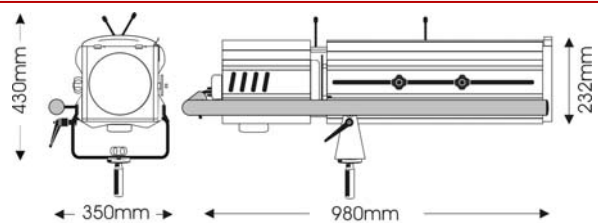

The most powerful dimmable tungsten halogen followspot in the Canto[®] range, the 2000W has been completely re-engineered to offer the market an even wider and better set of features. A large, user-friendly side handle, new mechanics on the mechanical dimmer and a number of "invisible" new features add to the existing specifications which have made Canto[®] a world-wide success.

An iris, mechanical dimmer, spigot, colour frame and 2m mains cable are supplied as standard, and a 5-colour colour changer is available as an optional extra.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2006/oct. LDR reserves the right to alter the specification without prior notice