

## Application data

Beam style	well-defined, flat field profile projection
Suitable for	medium scale theatre
Specification level	professional range
Beam angle	30° - 55°
Typical throw distance	5- 12m

## Electrical data

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m, 3 x 1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical data

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	11,9kg / 14,6kg
Overall dimensions	300mm (w) x 580mm (d) x 220mm (h) x max 420mm (h)
Packed volume	0,11m <sup>3</sup>
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on top of lamp tube

## Operational data

Focus adjustment	slide zoom controls (dia. and softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

## Lamp types

650W	CP67 3200K 120 hrs / T21 3000K 900 hrs
1000W	CP70 3200K 240 hrs / T19 3050K 900 hrs
1200W	CP90 3200K 240 hrs / T29 3000K 480 hrs

## LDR recommends Phillips lamps

## Accessories

Lamps	see above
Spare metal colour frame	20100106
Spare safety guard	20100206
Iris diaphragm	20100706
Gobo holder, A/B size, metal	20100806
Hook clamp	20100900
Alu-grip clamp	20101100
Safety bond	20101200
Colour scroller Xpress 18	20106006 with mounting plate 20600006

## Photometric data


Narrow focus											CP90
Beam dia.	2.1	2.7	3.2	3.8	4.3	4.8	5.4	5.9	6.4	m	
lux	5594	3580	2486	1827	1398	1105	895	740	622		
Distance	4	5	6	7	8	9	10	11	12	m	

Wide focus										
Beam dia.	4.2	5.2	6.2	7.3	8.3	9.4	10.4	11.5	12.5	m
lux	1494	956	664	488	373	295	239	198	166	
Distance	4	5	6	7	8	9	10	11	12	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# nota<sup>®</sup> 30/55 650 - 1200W profile spotlight

part number 10853040

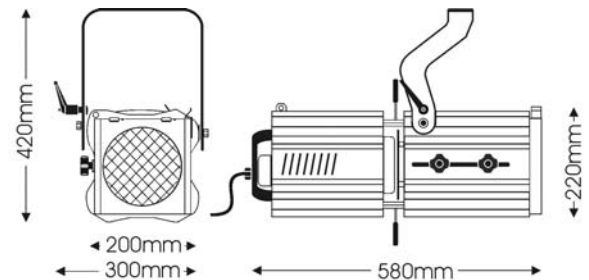

This extremely wide-angle 1000/1200W profile spotlight includes high-specification double condenser optical system for clean, crisp gobo projection.

The comprehensive feature list includes 30° - 55° zoom focus, rotating gate with 4 shutters, a cranked fork to accommodate acute over-stage rigging angles and a double-microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2006. LDR reserves the right to alter the specification without prior notice.